


SHENZHEN XIEJIA ELECTRONICS CO.,LTD. 深圳市协佳电子有限公司		文件编号	XJ-SP-3117
		发布日期	2004年5月4日
SPECIFICATION 规格书		第A版	第1页 共3页
MODEL NO. 产品名称. TC-22XA TC-22XC			
DRAWN 制订		APPD. 审批	
1. RATING (额定值) : DC 12V 50mA			
2. ELECTRICAL CHARACTERISTICS (电气性能规格):			
ITEM 项目		TEST CONDITIONS 测试条件	PERFORMANCE 规格
2.1	CONTACT RESISTANCE 接触电阻	MEASURED AT 1KHz SMALL CURRENT(10 mA OR LESS) 在1KHz 微小电流(10mA 以下)测试.	100mΩ MAX. 100 毫欧以下.
2.2	INSULATION RESISTANCE 绝缘电阻	APPLY A VOLTAGE OF 100V DC FOR 1 N. TO FOLLOWING PORTIONS AFTER WHICH MEASUREMENT SHALL BE MADE. (1) BETWEEN BODY AND CONDUCTOR. (2) BETWEEN CONDUCTORS NOT TO BE CONTACT. 输入100V DC 电压1分钟,按以下接触方法测试: (1) 接触端子之间. (2) 胶座体与排脚之间.	100MΩ MIN. 100 兆欧以上.
2.3	DIELECTRIC STRENGTH 耐电压	AC 250V (50-60Hz)FOR 1 MIN TRIP CURRENT:0.5 mA (1) BETWEEN TERMINALS. (2) BETWEEN INDIVIDUAL TERMINALS AND FRAME. 输入 AC 250V(50-60Hz)电压,1分钟感度电流为0.5 mA, 按以下接触方法测试: (1) 排脚相互之间 (2) 排脚与外壳之间	WITHOUT DAMAGE TO PARTS ARCING OR BREAKDOWN ETC. 没有绝缘破坏等异常.
3 .MECHANICAL CHARACTERISTICS (机械性能规格)			
ITEM 项目		TEST CONDITIONS 测试条件	PERFORMANCE 规格
3.1	OPERATING FORCE 作动力		160gf±50gf
3.2	TERMINAL STRENGTH 端子强度	A STATIC LOAD OF (500 gf) SHALL BE APPLIED TO THE TIP OF THE TERMINAL FOR 1 MIN IN ANY DIRECTION. 在任意一个方向的先端加上(500 gf)力度测试,时间为1分钟.	MECHANICAL AND ELECTRICAL CHARACTERISTICS SHALL BE SATISFIED WITHOUT DAMAGE OR EXCESSIVE LOOSENESS OF ACTUATOR. 在端子中没有裂开.松动等异常, 满足于机械、电器性能.
3.3	STANDARD ATMOSPHERIC CONDITIONS 测试标准状态	UNLESS OTHERWISE SPECIFIED. THE STANDARD RANGE OF ATMOSPHERIC CONDITIONS FOR MAKING MEASUREMENTS AND TESTS ARE AS FOLLOWS: (1) AMBIENT TEMPERATURE: 5℃ TO 35℃ (2) RELATIVE HUMIDITY : 45% TO 85% (3) AIR PRESSURE : 80Kpa TO 106Kpa 在没有指定的情况下测试温度、湿度、气压如下: (1) 温度为5℃~35℃. (2) 湿度为45%~85%. (3) 气压为80Kpa~106Kpa.	

SHENZHEN XIEJIA ELECTRONICS CO.,LTD. 深圳市协佳电子有限公司		文件编号 发布日期	XJ-SP-3117 2004年5月4日
SPECIFICATION 规格书		第 A 版	第 2 页 共 3 页
3.4	PRACTICAL TEMPERATURE RANGE 使用温度范围	-16℃~+60℃. 在-16℃~+60℃温度内使用。	
4. DURABILITY (耐久性):			
ITEM 项目		TEST CONDITIONS 测试条件	PERFORMANCE 规格
4.1	LIFE TEST 寿命试验	WITHOUT LOAD: AN ACTUATOR SHALL BE SUBJECT TO 100,000 CYCLES AT A SPEED OF 60 CYCLES FOR 1 MIN. 无负荷: 操作者以每分钟 60 次的频率作 100,000 回之无负荷测试。	(1) CONTACT RESISTANCE SHALL BE 200mΩ MAX. (2) MECHANICAL AND ELECTRICAL CHARACTERISTICS SHALL BE SATISFIED. (1) 接触电阻不能超于 200mΩ. (2) 其它、满足于机械、电器性能。
4.2	HEAT TEST 耐热试验	THE SWITCH SHALL BE STORED AT A TEMPERATURE OF 85±2℃ FOR 96 HOURS AND THEN IT SHALL BE SUBJECTED TO THE CONTROLLED RECOVERY CONDITIONS FOR 1 HOUR AFTER WHICH MEASUREMENT SHALL BE MADE. 放置在温度 85±2℃ 中测试 96 小时后,再放置正常室温中 1 小时来测定	THERE SHALL BE NO DAMAGE ON APPEARANCE. MECHANICAL AND ELECTRICAL CHARACTERISTICS SHALL BE SATISFIED. 外观无异常, 满足于机械, 电器性能。
4.3	COLD TEST 耐冷试验	THE SWITCH SHALL BE STORED AT A TEMPERATURE OF -25±3℃ FOR 96 HOURS. AND THEN IT SHALL BE SUBJECTED TO THE CONTROLLED RECOVER CONDITIONS FOR 1 HOUR AFTER WHICH MEASUREMENT SHALL BE MADE. 放置在温度-25±3℃ 中 96 小时后,再放置常温常湿中 1 小时来测定。	THERE SHALL BE NO DAMAGE ON APPEARANCE. MECHANICAL AND ELECTRICAL CHARACTERISTICS SHALL BE SATISFIED. 外观无异常, 满足于机械、电器性能。
4.4	HUMIDITY TEST 潮湿试验	THE SWITCH SHALL BE STORED AT TEMPERATURE OF 40±2℃ AND HUMIFITY OF 90% TO 96% FOR 96 HOURS, THEN THE SWITCH SHALL BE MAINTAINED AT STANDARD ATMOSPHERIC CONDITION FOR 1 Hr FOR OTHER PROCEDURES BE MADE. 放置 40±2℃. 的相对湿度为 90~96% 环境中 96 小时后, 再将样版放在正常环境 1 小时后进行测试。	MECHANICAL AND ELECTRICAL CHARACTERISTICS SHALL BE SATISFIED. 外观无异常, 满足于机械、电器性能。

4.5

SOLDERING
CONDITIONS
焊锡条件

HAND SOLDERING:
DEVICE: SOLDER IRON
A. 350C° Max. 3sec. Max.
B. 270C° Max. 5sec. Max.
REFLOW SOLDERING
手焊:
工具: 烙铁
A. 350C° Max. 3sec. Max.
B. 270C° Max. 5sec. Max.
回流焊

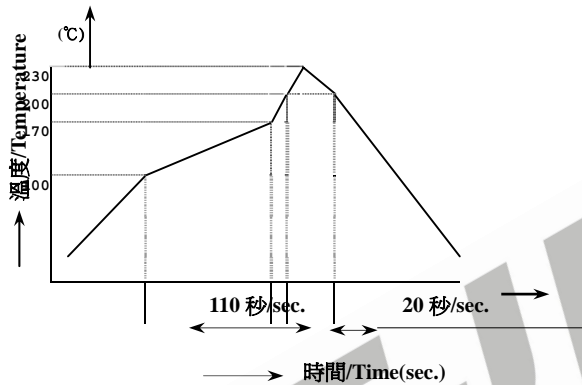

THERE SHALL BE NO DAMAGE ON
APPEARANCE.

MECHANICAL AND ELECTRICAL
CHARACTERISTICS SHALL BE
SATISFIED.

外观无异常, 满足于机械、电器性能。

XIEJIA
ELECTRONICS