

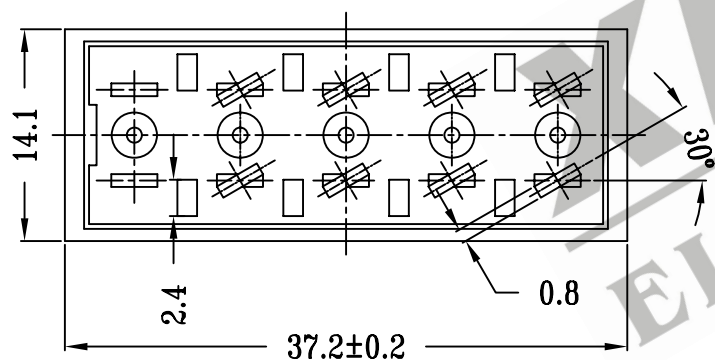
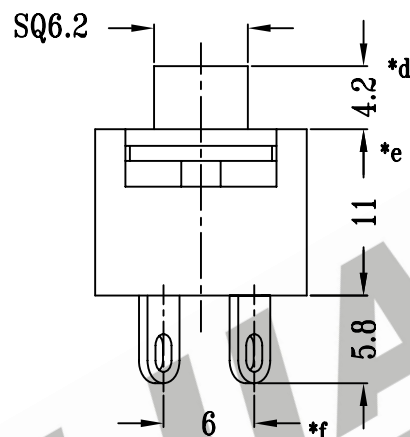



CAD FILE:

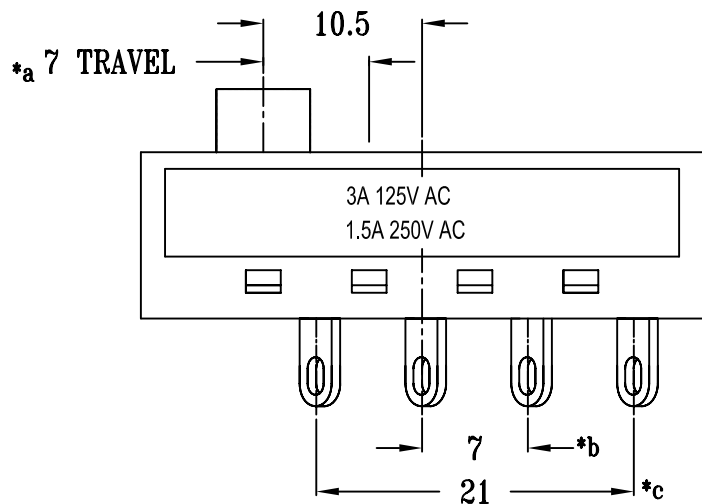

**SCHMATIC (NON-SHORTING)**

RATING :

**3A 125V AC**  
**1.5A 250V AC**

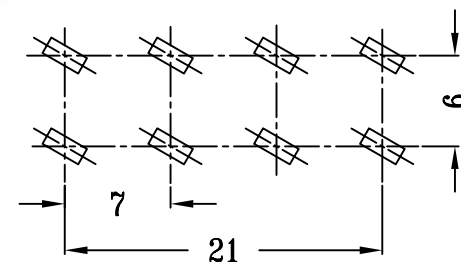

**P.C.B LAYOUT**

注:带"\*"表示关键尺寸(6个)

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE	SHENZHEN XIEJIA ELECTRONICS CO.,LTD.				
8	SPRING B	SUS	4	TEMPER	UNLESS SPECIFIED	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
7	CONTACT	COPPER STRIP	2	Ag PLATED OVER Ni PLATED						
6	COVER (UL)	NYLON66+F.G25% (UL94 V0)	1	BLACK	WITHIN: $1.5 \pm 0.1\text{mm}$	TITLE : VERTICAL SLIDE SWITCH				
5	CASE	NYLON66+F.G25% (UL94 V0)	1	BLACK	OVER : $1.5 \pm 0.2\text{mm}$					
4	TERMINAL	COPPER STRIP	8	Ag PLATED OVER Ni PLATED	MODEL: SS-24N02-A001-00		UNIT : mm	DRWG NO.: XJ-DR-SS24N02A001-00		
3	PRESS BAR	NYLON+F.G (UL94 V0)	1	BLACK	ALL MATERIALS MUST BE COMPLIANT TO ROHS		SCALE: 2:1	DWN.	ZHOUYU	2004-12-26
2	SPRING A	SUS	1	TEMPER				CHK'D	FANGYING	2004-12-26
1	KNOB	NYLON66+F.G25% (UL94 V0)	1	BLACK				APPD.	KANGXINAN	2004-12-26