


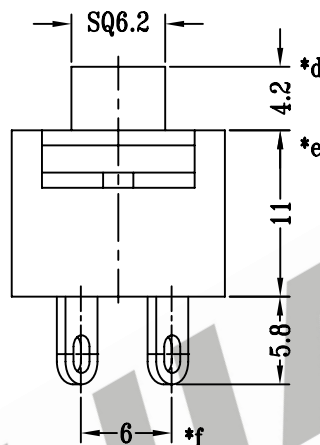
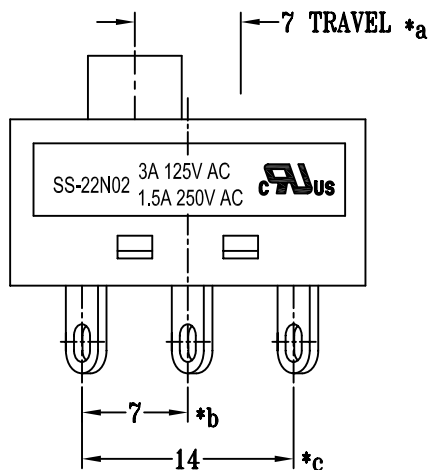


CAD FILE:

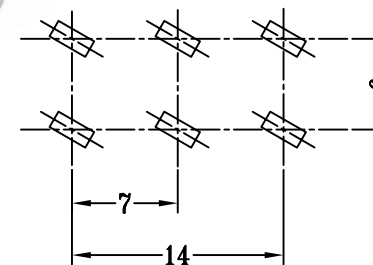

SCHEMATIC (SHORTING)

RATING:
3A 125V AC
1.5A 250V AC

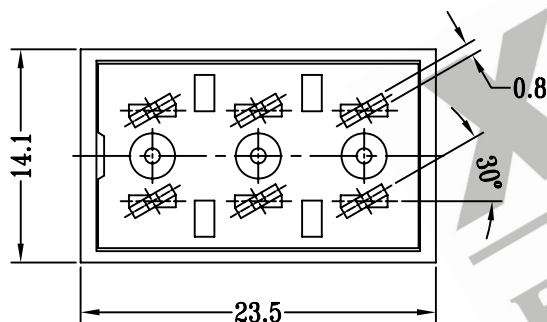

P.C.B LAYOUT

注:带"*"表示关键尺寸(6个)

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	SHENZHEN XIEJIA ELECTRONICS CO.,LTD.				
8	PRESS BAR	NYLON (UL94 V0)	1	BLACK	WITHIN: 1.5±0.1mm OVER: 1.5±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
7	SPRING B	SUS	4	TEMPER						
6	CONTACT	COPPER STRIP	2	Ag PLATED OVER Ni PLATED						
5	SPRING A	SUS	1	TEMPER	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	DRWG NO.: XJ-DR-SS22N02-00		
4	CASE	NYLON66+F.G25% (UL94 V0)	1	BLACK	MODEL: SS-22N02-A001-01		SCALE: 2 : 1	DWN.	ZHOUYU	2002-6-17
3	TERMINAL	COPPER STRIP	6	Ag PLATED OVER Ni PLATED	ALL MATERIALS MUST BE COMPLIANT TO ROHS			CHK'D	FANGYING	2002-6-17
2	COVER	NYLON66+F.G25% (UL94 V0)	1	BLACK				APPD.	KANGXINAN	2002-6-17
1	KNOB	NYLON66+F.G25% (UL94 V0)	1	BLACK						